


REV	DATE	ECO	DESCRIPTION	BY	CK	APP
-	6/14/01	NA	INITIAL RELEASE	CRP	NA	NA

INDICATOR FLUSH WITH SURFACE "A" BEFORE FUSE OPENS.
 INDICATOR EXTENDS .50in(12.7mm) AFTER FUSE OPENS.
 INDICATOR EXERTS 2 LBS FORCE AT END OF TRAVEL



RATING	CATALOG NO.
200E	A055B1DAR0-200E
175E	A055B1DAR0-175E
150E	A055B1DAR0-150E
125E	A055B1DAR0-125E
100E	A055B1DAR0-100E
80E	A055B1DAR0-80E
65E	A055B1DAR0-65E
50E	A055B1DAR0-50E
40E	A055B1DAR0-40E
30E	A055B1DAR0-30E
25E	A055B1DAR0-25E
20E	A055B1DAR0-20E
15E	A055B1DAR0-15E
10E	A055B1DAR0-10E

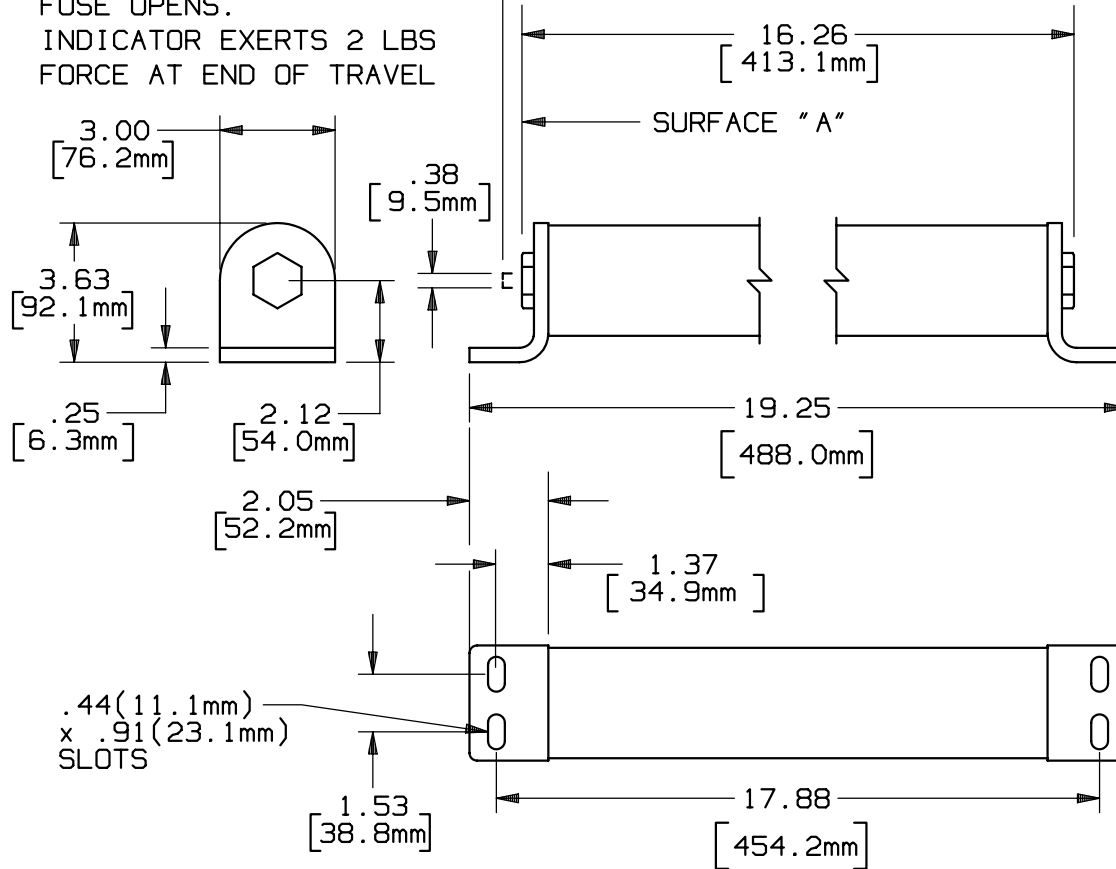

MERSEN USA NEWBURYPORT-MA, LLC
 374 MERRIMAC STREET
 NEWBURYPORT, MA 01950

MEDIUM VOLTAGE AMP-TRAP
 E-RATED GENERAL PURPOSE
 CURRENT LIMITING FUSE
 BOLT-IN SERIES, 10E TO 200E, 5.5KV MAX

OUTLINE DIMENSIONS
 NOT TO BE USED FOR PRODUCTION

700665

PRODUCT MANAGER

DESIGN ENGINEER

SIGN:
 DATE:

SIGN:
 DATE: