


REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
C	1/16/2007		REDRAWN FROM REV B ADDED CAT. NO. CP600A3	KMH		NA

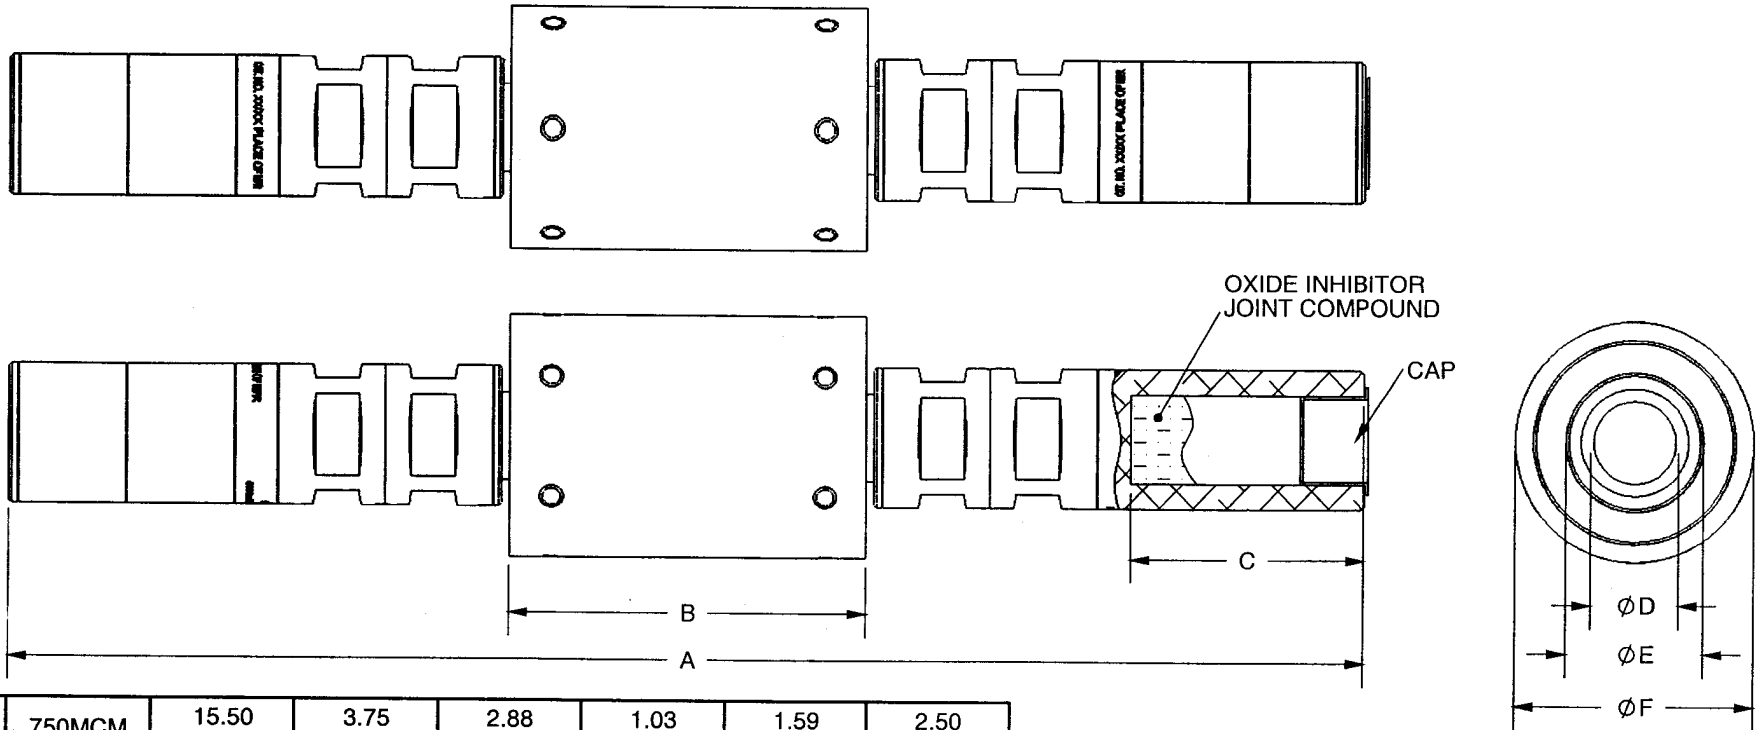

CATALOG NUMBER	CABLE SIZE	A	B	C	Ø D	Ø E	Ø F
CP750A1	750MCM	15.50 [393.7]	3.75 [95.2]	2.88 [73.2]	1.03 [26.2]	1.59 [40.4]	2.50 [63.5]
CP600A1	600MCM	14.19 [360.3]	3.75 [95.3]	2.44 [62.0]	.92 [23.4]	1.44 [36.6]	2.50 [63.5]
CP500A1	500MCM	15.38 [390.5]	3.62 [92.1]	2.88 [73.2]	.84 [21.2]	1.31 [33.3]	1.88 [47.6]
CP350A1	350MCM	13.88 [352.4]	3.62 [92.1]	2.50 [63.5]	.71 [18.0]	1.13 [28.7]	1.62 [41.3]
CP250A1	250MCM	13.88 [352.4]	3.62 [92.1]	2.50 [63.5]	.59 [15.1]	.94 [23.7]	1.44 [36.5]
CP4/0A1	4/0	13.88 [352.4]	3.62 [92.1]	2.50 [63.5]	.54 [13.8]	.84 [21.5]	1.44 [36.5]

NOTE:

- FOR HEAT SHRINKABLE TUBING  
ADD "HS" TO CAT. NO.  
EXAMPLE: CP750A3-HS

DIMENSIONS IN [ ] ARE MILLIMETERS



FERRAZ SHAWMUT INC.  
374 MERRIMAC STREET  
NEWBURYPORT, MA 01950

**CABLE PROTECTORS  
CABLE TO CABLE  
TYPE A1  
CP4/0A1 THRU CP750A1  
ALUMINUM CABLE**

OUTLINE DIMENSIONS  
NOT TO BE USED FOR PRODUCTION

**17759**

PRODUCT MANAGER  
SIGN: *RW*  
DATE: 3/29/07

DESIGN ENGINEER  
SIGN: *SL*  
DATE: 3/29/07